


REN-BS: Administration Guide

- 1. Configuration

1. Configuration

If you have administrator rights in Bitbucket Server, you can go to the repository's settings and click **Hooks** in the left-hand navigation.

Click **Enabled** for the **Repo Event Notifier for Bitbucket Server** plugin. You must add one URL and connection timeout (default is 30000 ms).

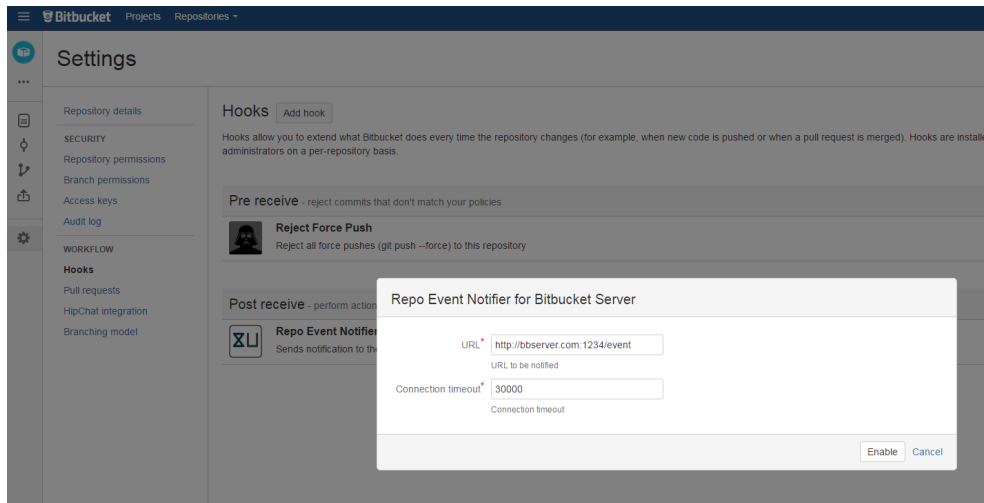

The URL must be in following format :

```
http://server:port/path
```

For Transformer default URL is in following format:

```
http://localhost:8050/event
```

The plugin sends notification to the url you provided whenever users pushes to the repository. The content type header of the **POST** h as an **'application/json'**.

Example of **json payload**:

```
{
  "sourceUrl" : "Bitbucket Server URL",
  "projectKey" : "ABC",
  "repositorySlug" : "javadoc-plugin",
  "branchID" : "refs/heads/master"
}
```